

PS4000 C-SJ5-25

Solar submersible pump system for 4" wells

Application

- drinking water supply
- pond management
- irrigation
- livestock watering
- pressurizing

Characteristics

- fast, failure-free installation
- excellent serviceability
- high reliability and life expectancy
- short Return of Investment (ROI) cycle
- lower Total Cost of Ownership (TCO)

Technical data

Item #	1281
Total dynamic head	max. 140 m
Flow rate	max. 7,0 m ³ /h
Vmp**	> 238 V
Voc	max. 375 V



Components

Controller: PS4000

- controlling and monitoring
- control inputs for well probe, dry running protection, remote control etc.
- protected against reverse polarity, overload and high temperature
- integrated MPPT (Maximum Power Point Tracking)

Motor: ECDRIVE 4000-C

- maintenance-free brushless DC motor
- water filled
- no electronics in the motor
- submersion max. 250 m, IP68
- premium materials

Pump end: PE C-SJ5-25


- high reliability and life expectancy
- non-return valve
- premium materials
- optional: dry running protection

PS4000 C-SJ5-25

Solar submersible pump system for 4" wells

Pump chart


Max. power voltage (Vmp^{**}): > 238 V

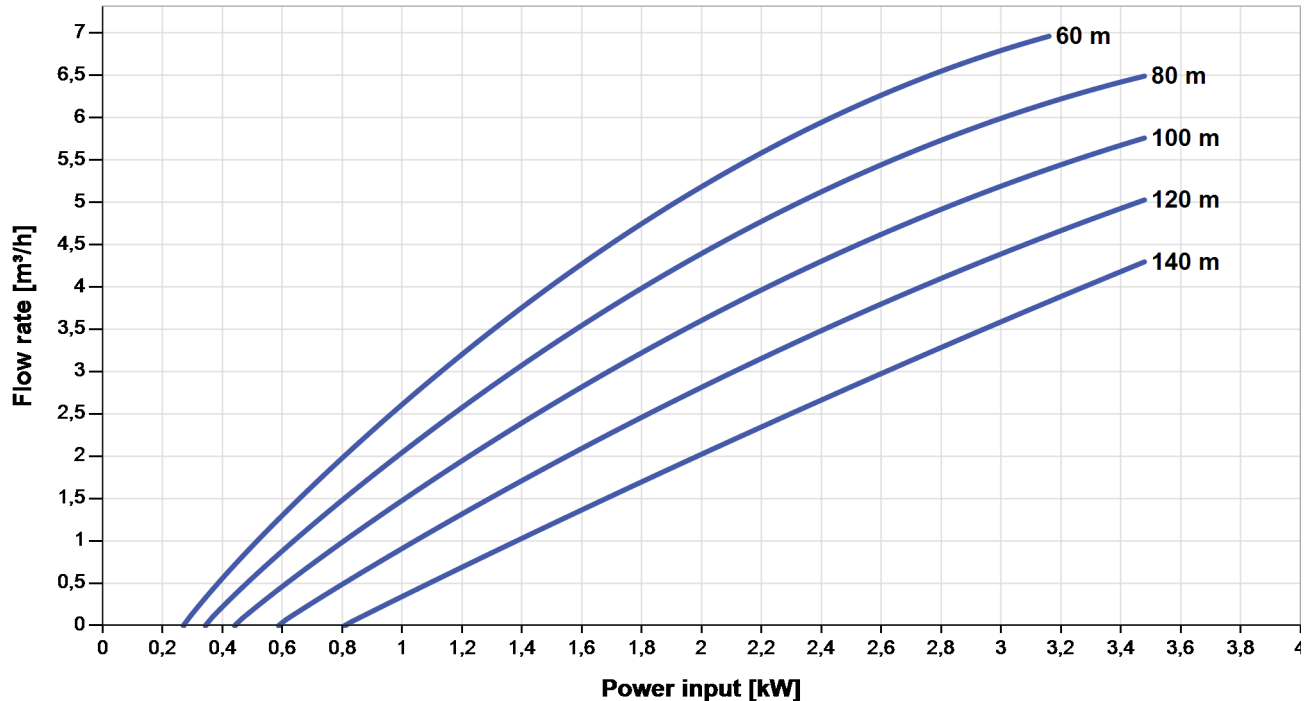

Dimensions and weights


Controller

H = 595 mm
 H2 = 563 mm
 W1 = 178 mm
 W2 = 156 mm
 W3 = 116 mm
 D = 165 mm
 D1 = 150 mm

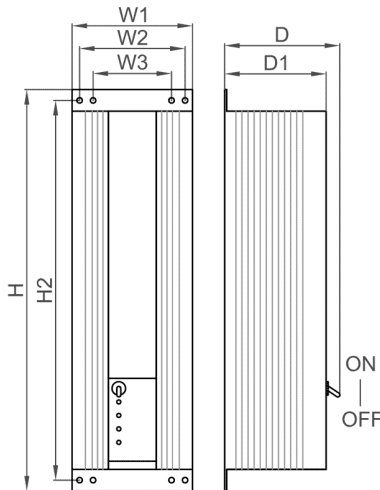

Pump unit

A = 941 mm
 B = 245 mm
 C = 696 mm
 D = 96 mm
 E = 98 mm
 S = 1,5 in

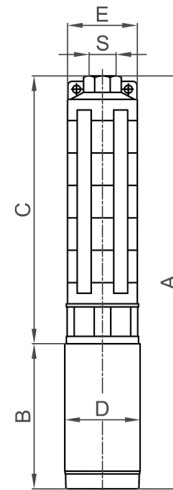

	net weight	packaging	shipping volume	gross weight
Controller	9,0 kg	670x250x240 mm	0,040 m ³	9,9 kg
Pump unit	18 kg	1.030x160x150 mm	0,025 m ³	19 kg
Motor	10 kg	160x140x400 mm	0,009 m ³	10 kg
Pump end	8,0 kg	850x160x150 mm	0,020 m ³	8,6 kg

*Max. flow rate at min. recommended head

**Vmp: max. power voltage under Standard Test Conditions (STC): AM = 1.5, E = 1000 W/m², cell temperature 25 °C