

# PS21k C-SJ42-10

## Solar submersible pump system for 6" wells

### Application

- drinking water supply
- pond management
- irrigation
- livestock watering
- pressurizing

### Characteristics

- fast, failure-free installation
- excellent serviceability
- high reliability and life expectancy
- short Return of Investment (ROI) cycle
- lower Total Cost of Ownership (TCO)

### Technical data

Item #	1200
Total dynamic head	max. 90 m
Flow rate	max. 65 m <sup>3</sup> /h
Vmp**	> 500 V
Voc	max. 800 V



### Components

#### Controller: PS21k

- controlling and monitoring
- control inputs for well probe, dry running protection, remote control etc.
- protected against reverse polarity, overload and high temperature
- integrated MPPT (Maximum Power Point Tracking)
- datalogger

#### Motor:

- highly efficient 3-phase AC motor
- no electronics in the motor
- submersion max. 300 m, IP68
- premium materials

#### Pump end: PE C-SJ42-10


- high reliability and life expectancy
- non-return valve
- premium materials
- optional: dry running protection

## PS21k C-SJ42-10

Solar submersible pump system for 6" wells

### Pump chart



Max. power voltage (Vmp<sup>\*\*</sup>): > 500 V

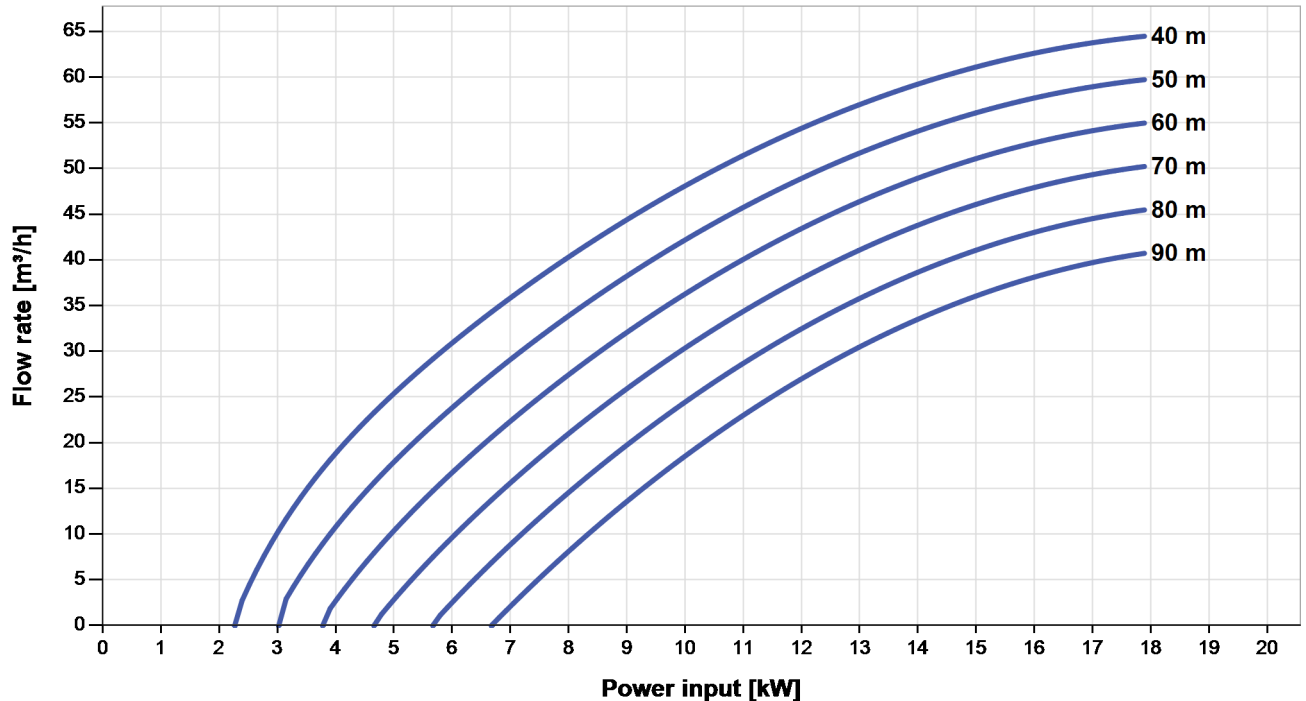

### Dimensions and weights


#### Controller

H = 350 mm  
 H1 = 310 mm  
 H2 = 295 mm  
 W = 250 mm  
 W1 = 235 mm  
 D = 200 mm  
 D1 = 200 mm  
 D2 = 167 mm



#### Pump unit

A = 1.157 m  
 B = 777 mm  
 C = 380 mm  
 D = 138 mm  
 E = 147 mm  
 S = 3 in

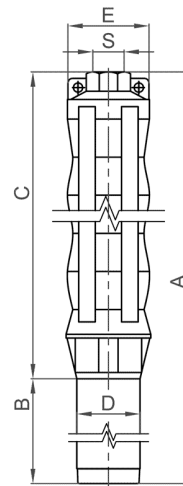

	net weight	packaging	shipping volume	gross weight
Controller	9,0 kg	420x330x300 mm	0,042 m <sup>3</sup>	11 kg
Pump unit	73 kg	-	-	-
Motor	65 kg	1.060x160x160 mm	0,027 m <sup>3</sup>	66 kg
Pump end	8,0 kg	1.480x160x180 mm	0,043 m <sup>3</sup>	9,4 kg

\*Max. flow rate at min. recommended head

\*\*Vmp: max. power voltage under Standard Test Conditions (STC): AM = 1.5, E = 1000 W/m<sup>2</sup>, cell temperature 25 °C