

# PS9k C-SJ75-1

## Solar submersible pump system for 8" wells

### Application

- drinking water supply
- pond management
- irrigation
- livestock watering
- pressurizing

### Characteristics

- fast, failure-free installation
- excellent serviceability
- high reliability and life expectancy
- short Return of Investment (ROI) cycle
- lower Total Cost of Ownership (TCO)

### Technical data

Item #	1195
Total dynamic head	max. 14 m
Flow rate	max. 131 m <sup>3</sup> /h
Vmp**	> 500 V
Voc	max. 800 V



### Components

#### Controller: PS9k

- controlling and monitoring
- control inputs for well probe, dry running protection, remote control etc.
- protected against reverse polarity, overload and high temperature
- integrated MPPT (Maximum Power Point Tracking)
- datalogger

#### Motor:

- highly efficient 3-phase AC motor
- no electronics in the motor
- submersion max. 300 m, IP68
- premium materials

#### Pump end: PE C-SJ75-1


- high reliability and life expectancy
- non-return valve
- premium materials
- optional: dry running protection

# PS9k C-SJ75-1

## Solar submersible pump system for 8" wells

### Pump chart



Max. power voltage (Vmp<sup>\*\*</sup>): > 500 V

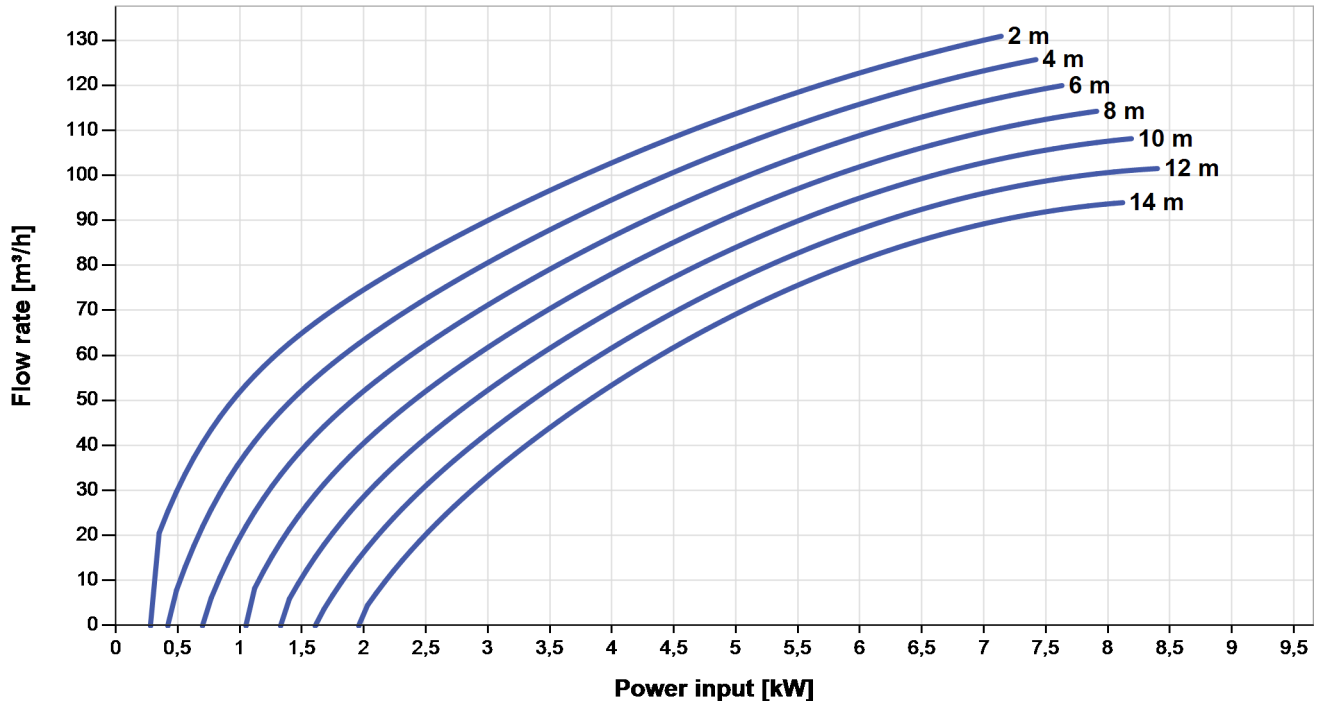

### Dimensions and weights


#### Controller

- H = 350 mm
- H1 = 310 mm
- H2 = 295 mm
- W = 250 mm
- W1 = 235 mm
- D = 200 mm
- D1 = 200 mm
- D2 = 167 mm



#### Pump unit

- A = 1.133 mm
- B = 645 mm
- C = 488 mm
- D = 138 mm
- E = 197 mm
- S = 5 in

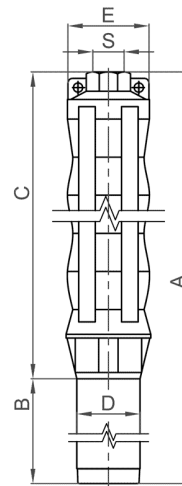

	net weight	packaging	shipping volume	gross weight
Controller	9,0 kg	420x330x300 mm	0,042 m <sup>3</sup>	11 kg
Pump unit	72 kg	-	-	-
Motor	52 kg	1.060x160x160 mm	0,027 m <sup>3</sup>	53 kg
Pump end	20 kg	670x250x240 mm	0,040 m <sup>3</sup>	21 kg

\*Max. flow rate at min. recommended head

\*\*Vmp: max. power voltage under Standard Test Conditions (STC): AM = 1.5, E = 1000 W/m<sup>2</sup>, cell temperature 25 °C